










SLINGS



**⚠ Before any use, read this notice carefully and then retain it.**

Type d'anneau / Sling Type / Tipo de anillo Tipo di anello / Rundschlingen-Typ	Matière / Material / Material Materiale / Material	Charge de rupture/Static strenght/Carga de rotura Carico di rottura / Statische Halterkraft
Tub 16 mm	Nylon	<b>2200 daN (kg)</b>
Tub 26 mm	Nylon	
Flat 18 mm	Polyester	
Flat 26 mm	Nylon	
Flat 30 mm	Nylon	
Dyn. 6 mm	Dyneema	
Dyn. 12 mm	Dyneema	
Express 18 mm	Polyester	
Express Basic 19 mm	Polyester	
Express Dyn. 12 mm	Dyneema	

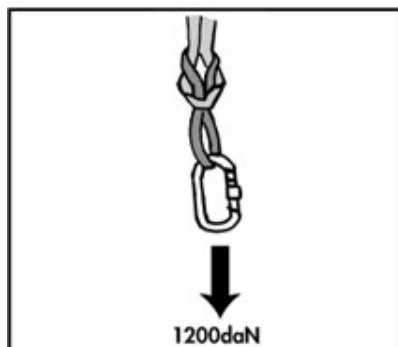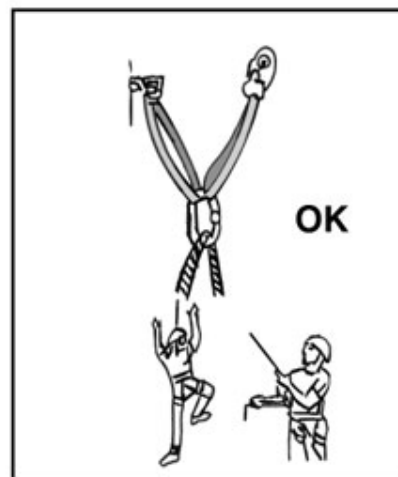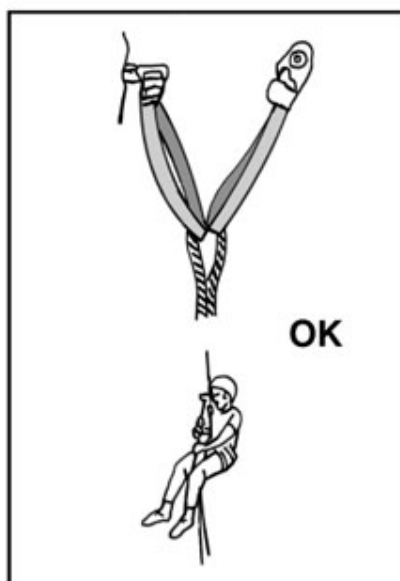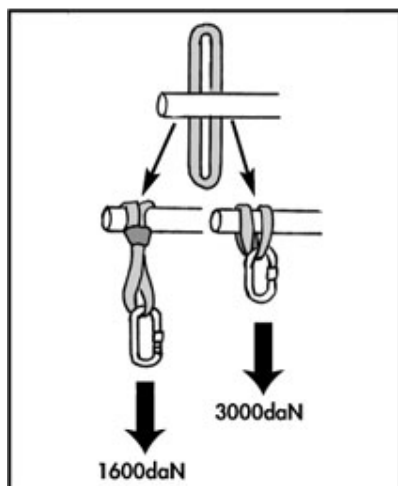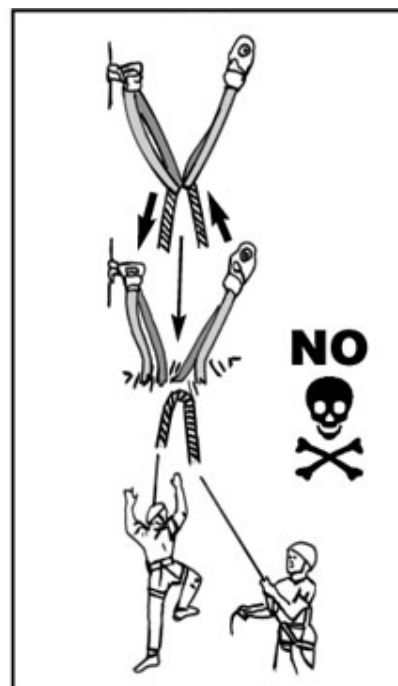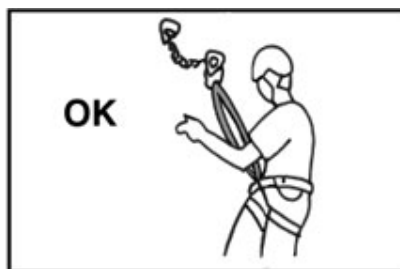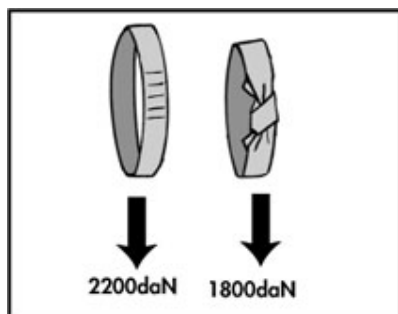

CE 0120

Made in France

3 year guarantee

EN 566

**USE**

- These slings are specifically manufactured for mountaineering, rock climbing and security.
- The various components of the safety chain (harness, rope, karabiners, tape, slings, anchors, belaying devices, descenders) should conform to UIAA or EN Standards.
- Check that this product is compatible with the other components of your equipment.
- When a sling is used as positioning lanyard, never climb above the anchor point.

**PRECAUTIONS**

- The slings must be protected from sharp edges and other mechanical hazards.
- When affected by water or ice they become much more sensitive to abrasion and lose strength: redouble your precautions.
- The temperature in which they are stored or used must never exceed 80°C. The melting temperature of polyamide is 215 °C, that of Dyneema is 145°C and that of polyester is 260° C.
- Before and during use, the possibility of rescue in case of difficulty must be considered.

**CARE AND MAINTENANCE**

- The slings must not be allowed contact with chemical agents, particularly acids which may destroy the fibers without visible evidence.
- Avoid unnecessary exposure to UV, store the slings in a cool, shaded place, away from dampness and direct heat. For transporting, bear the same considerations in mind.
- If they get dirty, wash in cold, clean water, if necessary using a cleaning agent suitable for delicate fabrics, with a soft synthetic fibre brush. Disinfect only using materials

N° de lot / Batch N° / N° de lote / N° di lotto / Serien N°

that have no effect on the synthetic materials used.

- To dry, after use or washing, leave in a dry shaded place away from direct heat.
- Before and after each use, check the state of the stitching and the tape, in particular the state of the edges.
- This product must be inspected periodically and meticulously, every 3 months if in frequent use, annually for occasional use.
- All and every modification or repair is forbidden.
- Never hide any deterioration under adhesive tape.
- The product is personal equipment. During any use away from you it may be subject to grave damage, which may not be visible.

#### LIFETIME

- Lifetime = Time of storage before first use + time in use.
- The working life depends on the frequency and the type of use.
- Abrasion, UV exposure and humidity gradually degrade the properties of the slings.
- Storage time : In good storage conditions this product may be kept for 5 years before first use without affecting its future lifetime duration in use.

#### ➤ Lifetime :

- Heavy use : 1 year
- Use of average intensity : 3 years
- Very occasional use : 10 years.

Attention : These are the nominal lifetimes indicated, a sling could be destroyed during its first use. It is the inspections which determine if the product must be scrapped more quickly. Proper storage between uses is essential. The lifetime of the sling in use must never exceed 10 years. **The total maximum lifetime (storage before use + lifetime in use) is thus limited to 15 years.**

- A sling must be scrapped without delay if :
  - it has taken a major fall, approaching fall factor 2,
  - on inspection it appears to be damaged,
  - it has been in contact with dangerous chemical products,
  - if there is the slightest doubt about its security.

#### WARNING

- The various cases of wrong use shown in this notice are not exhaustive, there are innumerable wrong uses possible, it is not feasible to show them all.
- This product is designed for climbing and mountaineering only.
- Climbing and mountaineering are inherently dangerous.
- Special knowledge and training are required to use this product.
- This product must only be used by competent and responsible persons, or those placed under the direct control of a competent person.
- Failure to follow these warnings increases the risk of injury or death.
- The use of "second-hand" equipment is strongly discouraged.
- You are responsible for your own actions and decisions.

#### MEANING OF MARKINGS :

**CE** : Conformity to the European directive

**0120** : Number of the Notified Body, SGS 217-221 London Road - Camberley - Surrey - GU15 3EY - United Kingdom

**Control number and serial number** : The last 2 digits indicate the year of manufacture

**EN 566** : Standard reference

Notified body for CE type-examination : CETE APAVE SUDEUROPE - BP 193 - 13322 MARSEILLE Cedex - France, no 0082.

#### BEAL GUARANTEE

This product is guaranteed for 3 years against any faults in materials or manufacture. Exclusions from the guarantee: normal wear and tear, modifications or alterations, incorrect storage, poor maintenance, damage due to accidents, to negligence, or to improper or incorrect usage.

#### Responsibility

BEAL is not responsible for the consequences, direct, indirect or accidental, or any other type of damage befalling or resulting from the use of its products.

Ets BEAL - 2, rue Rabelais - 38200 Vienne FRANCE  
 Tél : 33 (0)4 74 78 88 88 - Fax : 33 (0)4 74 85 27 76  
<http://www.beal-planet.com> - email: [beal@beal-planet.com](mailto:beal@beal-planet.com)

